

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|---|
| (51) International Patent Classification⁵ : B05B 5/043, A61M 15/00 | A2 | (11) International Publication Number: WO 94/14543 (43) International Publication Date: 7 July 1994 (07.07.94) |
| (21) International Application Number: PCT/GB93/02634 (22) International Filing Date: 22 December 1993 (22.12.93) (30) Priority Data: 9226717.8 22 December 1992 (22.12.92) GB (71) Applicant (for all designated States except US): ELEC-TROSOLS LTD. [GB/GB]; Thursley Copse, Farnham Lane, Haslemere, Surrey GU27 1HA (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): COFFEE, Ronald, Alan [GB/GB]; Thursley Copse, Farnham Lane, Haslemere, Surrey GU27 1HA (GB). (74) Agent: RUTTER, Keith; SmithKline Beecham, Corporate Intellectual Property, Great Burgh, Yew Tree Bottom Road, Epsom, Surrey KT18 5XQ (GB). | | (81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i> |
| (54) Title: DISPENSING DEVICE (57) Abstract An electrohydrodynamic dispensing device for comminuting a liquid, wherein the liquid is comminuted by an induced electrical charge. | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|----|--------------------------|----|---------------------------------------|----|--------------------------|
| AT | Austria | GB | United Kingdom | MR | Mauritania |
| AU | Australia | GE | Georgia | MW | Malawi |
| BB | Barbados | GN | Guinea | NE | Niger |
| BE | Belgium | GR | Greece | NL | Netherlands |
| BF | Burkina Faso | HU | Hungary | NO | Norway |
| BG | Bulgaria | IE | Ireland | NZ | New Zealand |
| BJ | Benin | IT | Italy | PL | Poland |
| BR | Brazil | JP | Japan | PT | Portugal |
| BY | Belarus | KE | Kenya | RO | Romania |
| CA | Canada | KG | Kyrgyzstan | RU | Russian Federation |
| CF | Central African Republic | KP | Democratic People's Republic of Korea | SD | Sudan |
| CG | Congo | KR | Republic of Korea | SE | Sweden |
| CH | Switzerland | KZ | Kazakhstan | SI | Slovenia |
| CI | Côte d'Ivoire | LI | Liechtenstein | SK | Slovakia |
| CM | Cameroon | LK | Sri Lanka | SN | Senegal |
| CN | China | LU | Luxembourg | TD | Chad |
| CS | Czechoslovakia | LV | Latvia | TG | Togo |
| CZ | Czech Republic | MC | Monaco | TJ | Tajikistan |
| DE | Germany | MD | Republic of Moldova | TT | Trinidad and Tobago |
| DK | Denmark | MG | Madagascar | UA | Ukraine |
| ES | Spain | ML | Mali | US | United States of America |
| FI | Finland | MN | Mongolia | UZ | Uzbekistan |
| FR | France | | | VN | Viet Nam |
| GA | Gabon | | | | |

DISPENSING DEVICE

The invention relates to a dispensing device for comminuting a liquid and the uses of such a device, especially in medicine.

5 Dispensing devices are known which produce a finely divided spray of liquid droplets by electrostatic (more properly referred to as 'electrohydrodynamic') means. The droplet spray in such devices is generated by the application of an electric field to a liquid at a spray head or spray edge. The potential of the applied electric field is sufficiently high to provide comminution of the liquid from the spray head. The
10 droplets produced are electrically charged and thus are prevented from coagulating by mutual repulsion.

Electrohydrodynamic sprayers have potential uses in many areas, including agriculture and the automotive industry and also for dispensing cosmetics and medicines.

15 United Kingdom patent number 1569707 describes such an electrohydrodynamic spray device principally for use in crop spraying.

United Kingdom patent number 2018627B discloses an electrohydrodynamic spray device wherein the charged droplet spray is fully or partially electrically discharged by means of an earthed electrode having a sharp or pointed edge and
20 located downstream of the spray head. European Patent number 0234842 also uses this technology and relates to an inhaler in which charged droplet spray is discharged prior to inhalation by means of a sharp or pointed discharge electrode carrying an opposite charge to the droplet spray and located downstream of the spray head. The droplets are discharged to facilitate droplet deposition into the respiratory tract by
25 preventing deposition of charged droplets onto the mouth and throat of the user.

A common feature of all known electrohydrodynamic spray devices is that the electric charge used to generate the spray is applied directly to the spray head. It has now surprisingly been found that the direct application of the field is not essential and that the electrohydrodynamic comminution of a liquid may be accomplished by
30 inducing the required electric charge at the spray head. In addition and advantageously, it has been found that the comminutions produced can be partially or fully discharged prior to use.

This method of induced charging has been found to provide better comminution of liquids having lower electrical resistivity.

35 Accordingly, it is one aspect of the invention that there is provided an electrohydrodynamic dispensing device for comminuting a liquid, wherein the liquid is comminuted by an induced electrical charge.

The dispensing device normally comprises a comminution site, a means for supplying liquid to the comminution site and a means for inducing an electrical charge at the comminution site sufficient to comminute the liquid.

5 The comminution site may be any conventional electrohydrodynamic comminution site such as a surface or edge generally provided by a thin capillary tube, a nozzle or a slot defined by two parallel plates.

Appropriate means for supplying liquid to the comminution site include mechanical or electrically powered pumps which are capable of providing the required flow rate of liquid to the comminution site such as a syringe pump or the
10 electrically powered pump described in EP 0029301.

The comminution means of the invention can be used with a large range of flow rates, but generally operates with flow rates in the range of between 0.1 to 500 μ L per second, such as 0.5 to 5 μ L per second, especially for inhaled administration, or 10 to 200 μ L per second, especially for agricultural use.

15 The means for inducing the electrical charge at the comminution site may be any conventional source of electrical charge which in use is capable of inducing a charge sufficient to comminute the liquid from the comminution means including a high voltage generator or a piezo-electric generator. The charge required is usually of the order of 1-20 kilovolts for example 10 kilovolts.

20 After formation of the liquid comminution, the electrically charged liquid droplets are attracted towards and will impact the means for inducing the electrical charge at the comminution site. In a preferred aspect of the present device, there is therefore provided a means for partially or fully electrically neutralising the liquid comminution before it impacts the induced charging means.

25 One suitable means for partially or fully electrically discharging the liquid comminution is a sharp or pointed discharge electrode located downstream of the comminuted liquid.

The sharp or pointed discharge electrode may be earthed or it may be maintained at a polarity opposite to that of the induced charging means by connection
30 to a suitable charging means. In either case the comminuted liquid is partially or fully discharged by a cloud of charged ions produced from the surrounding air having an opposite electrical charge to that on the comminuted liquid spray. The ion cloud is attracted towards, collides with and thereby partially or fully discharges the liquid spray.

35 In one particularly advantageous form of the device, the means for fully or partially discharging the liquid comminution is provided by a combination of the sharp or pointed discharge electrode and at least one capacitor, the capacitor acting to absorb the charge from the gaseous ions from the sharp or pointed discharge electrode

until the induced comminution of the liquid is established, the capacitor is arranged to absorb the ions until it reaches a predetermined potential at which potential it ceases to absorb the ions thereby allowing them to partially or fully discharge the liquid comminution.

5 Generally, the capacitor is chosen to have a time constant having the same order as the time required to establish the liquid comminution spray cloud. Thus the time constant will have a value, in seconds, which is the product of the capacitance, C and the resistance, R, of the capacitor.

10 The value of $C \times R$ for the capacitor is chosen so that the capacitor will charge until it reaches a prearranged potential sufficient to modify the electric field, the capacitor then discharges towards the established spray cloud. Generally, the time-constant required will be of the order of seconds or a number of milliseconds. For example, a capacitor of 0.1 microfarad with a resistance of 10 megohms will produce a time constant of one second.

15 In yet a further aspect, the means for fully or partially discharging the liquid comminution is provided by an electrode arranged to have a first surface capable of producing an electric field sufficient to induce the required charge for liquid comminution in the comminution means and also to impart sufficient inertia to the liquid comminution so that it substantially bypasses the first surface, the electrode
20 also having a second surface capable of producing an ionic discharge to fully or partially discharge the liquid comminution.

 Generally, the second surface is shaped to have a sharp edge or a point which in use produces the ionic discharge.

25 Suitably, the electrode is an annular electrode coaxially located with respect to the intended flight path of the liquid comminution, in use, the upper surface of the annular electrode induces the required charge in the comminution means, the lower surface being shaped so as to produce the ionic discharge.

30 In operation the field pattern of the upper surface of the annular electrode is such that the comminution is directed onto an axial flight path with respect to the annular electrode and is provided with sufficient inertial force to substantially bypass the first surface, the comminution is then fully or partially discharged by the gaseous ions produced by the second surface.

35 The device of the invention may be used to dispense liquids comprising components useful for human or animal health care, such as medicaments for pharmaceutical or public health care use or medically useful compounds such as anesthetics.

 Suitable liquids include liquids comprising components for agricultural use such as pesticides or biocides.

Suitable liquids include liquid cosmetic formulations.

Other suitable liquids include paints and inks. Also included are liquids for providing aromas.

Preferred liquids are pharmaceutically active liquids.

5 The comminution means of the dispenser provides liquid droplets within the range of from about 0.1 to about 500 microns in diameter: More usually from 0.1 to 200 microns, such as 1.0 to 200 microns: Examples include droplets within the range of 5.0 to 100, 0.1 to 25, 0.5 to 10 or 10 to 20 microns. A favoured range for inhaled administration is 0.1 to 25 or 0.5 to 10 microns, especially for administration to the
10 lower respiratory tract, and 10 to 25 microns, especially for administration to the upper respiratory tract.

For a given liquid the diameter of the droplets can be controlled by varying the applied voltage and liquid flow rate using routine experimental procedures.

15 Liquids having viscosities within the range of from 1 to 500 centipoise and resistivities in the range of from 10^2 - 10^8 ohm m can be comminuted by the present device.

As stated this method of induced charging has been found to provide better comminution of liquid having a lower electrical resistivity, such as is the case of aqueous solvents, including solvent mixtures, and solutions thereof and low resistivity
20 organic solvents such as alcohols.

One favoured use of the device of the invention is for the dispensation of a comminuted liquid for inhalation.

Accordingly, in one preferred aspect of the invention there is provided a device for comminuting a liquid for inhalation, wherein the liquid is comminuted by
25 an induced electrical charge.

The device of the invention may be adapted into any embodiment form which dispenses comminuted liquid for inhalation, for both medicinal and non-medicinal use.

Non-medicinal inhalation uses includes dispensing perfumes and aromas.

30 Preferably, the device is in the form of an inhaler, for the inhaled delivery of a medicament.

A preferred liquid is therefore a liquid medicament formulation adapted for inhaled administration.

35 Medicaments suitable for adaption for inhaled administration include those used for the treatment of disorders of the respiratory tract, such as reversible airways obstruction and asthma and those used in the treatment and/or prophylaxis of disorders associated with pulmonary hypertension and of disorders associated with right heart failure by inhaled delivery.

One problem associated with inhalers is coordinating the release of the liquid spray with inhalation by the user. It is a further aspect of the present invention that there is provided a means which facilitates this problem.

Accordingly, there is also provided an inhaler, comprising an
5 electrohydrodynamic comminution means, a means for partially or fully discharging the liquid comminution and a conduit through which the liquid comminution is administered, wherein the discharging means is arranged to be activated by inhalation of the user.

Suitably, the electrohydrodynamic comminution means comprises a
10 comminution site and a charging means, the charging means acting directly or by induction to produce the required charge on the comminution means, favourably acting by induction.

Suitably, the electrohydrodynamic comminution means comprises a means for supplying liquid to the comminution means.

15 One favoured arrangement wherein the discharging means is activated by inhalation of the user comprises a valve means located so as to open and close the conduit, suitably within the conduit, the valve means being opened by inhalation of the user which then activates the discharging means.

A suitable discharging means is provided by one or more capacitors or by a
20 sharp edged or pointed electrode.

When the discharging means is a sharp edged or pointed electrode, the discharging means is preferably operationally attached to the valve means such that when the valve means opens the sharp edged or pointed electrode is thereby exposed to the comminuted liquid.

25 A suitable valve means is a flap valve.

In a particular instance the sharp edged or pointed electrode is fixed so as to extend upwards from the plane of the flap valve, the flap valve being pivotally fixed so as to open and close the conduit, such that when the flap valve pivots open the sharp edged or pointed electrode pivots into the flight path of the comminuted liquid.

30 Thus in a most particular instance the invention provides an inhaler, the inhaler comprising an electrohydrodynamic comminution site, a means for supplying liquid to the comminution site, a means for charging the comminution site, a sharp edged or pointed electrode for partially or fully discharging the liquid comminution and a conduit through which the liquid comminution is administered, the conduit
35 having a valve means activated by inhalation of the user, wherein the valve means comprises a flap shaped to seal the conduit, the flap being pivotally fixed so as to open and close the conduit, the sharp edged or pointed electrode extends upwards

from the plane of the flap valve, such that in use the flap valve pivots open and the discharging means pivots into the flight path of the comminuted liquid.

When the devices comprise a sharp edged or pointed electrode, the arrangement suitably provides that the sharp edged or pointed electrode is electrically
5 shielded from the liquid comminution when the valve means is closed. One particular method of achieving this is that the sharp edged or pointed electrode pivots into a recess formed in the charging means when the valve means closes.

When used herein 'a comminution' includes a liquid droplet spray.

When used herein 'medicament' includes proprietary medicines,
10 pharmaceutical medicines and veterinary medicines.

When used herein, unless more specifically defined herein, 'inhaled administration' includes administration to and via the upper respiratory tract, including the nasal mucosa, and the lower respiratory tract.

The description 'sharp edged or pointed' when used herein in relation to
15 operational parts of the device, such as the electrode, also includes electrical equivalents thereof and hence includes shapes such as ridges and the like: The essential requirement is that the operational part of the device has, or a component or feature of the device has, dimensions which will give rise to a sufficiently high electrical field strength so as to exceed the breakdown strength of the air. This topic
20 is theoretically described in "Depositional Control of Macroscopic Particles by High Strength Electric Field Propulsion" by R A Coffee, in "Transactions of the Institution of Electrical and Electronic Engineers, Industry Applications, USA", Vol. IA-10 pp 511 to 519, July/August 1974. An example is an electrical field strength of approximately 3 million volts per meter.

25 The liquid medicinal formulations for use in the device of the invention may be formulated according to conventional procedures, such as those disclosed in the US Pharmacopoeia, the European Pharmacopoeia, 2nd Edition, Martindale The Extra Pharmacopoeia, 29th Edition, Pharmaceutical Press and the Veterinary Pharmacopoeia.

30 The liquid cosmetic formulations for use in the device of the invention may be formulated according to conventional procedures, such as those disclosed in Harry's Cosmeticology, 9th Edition, 1982, George Goodwin, London.

The invention may now be described, by way of illustration, with reference to the accompanying Figures 1 to 5:

35 In Figures 1 and 2, a device of the invention is illustrated in which a pressure reduction created by the action of breathing through a suitable ducting (1) causes a lightweight flap (2), balanced by a second member (3) pivoted at a hinge (4) and connected to a dc high voltage supply of either polarity (5) to revolve through a

sufficient degree of arc to allow the second member of the flap to become exposed to the electric field and then create gaseous ions.

The flap valve thus has two actions: (a) it opens an air passage (1) to facilitate a flow of droplets; and (b) it simultaneously rotates a balancing member (3) attached to the flap (2) through a sufficient degree of arc to expose a ridge, or nipple (6) having one dimension of less than about 1.0mm radius of curvature.

The ridge, or nipple (6) may be made of any conducting, or semi-conducting material such as metal, or carbon-loaded plastic, and is connected to a source of high voltage (5). When not actuated by breathing, the ridge will be electrically screened by the surface of a flat electrode (7), also connected to the high voltage source (5). In this position the electrode (7) may be switched on, or off by a simple switch (8).

When switched on, the electrode induces a potential of opposing polarity at the tip of a nearby nozzle (9). This induced potential causes liquid at the tip of the nozzle to emerge as a fast jet which breaks up into charged droplets. The nozzle (9) is connected to earth.

The invention therefor performs more than one function: (a) the flap valve (2) allows droplets to be inhaled only when the valve is actuated by the act of breathing; (b) the principle of induction, rather than direct, nozzle charging improves the control of droplet size and maximum flow rate, for those liquids which are difficult to atomize by the electrohydrodynamic process described in Patent Application 9215984.7; (c) it overcomes the inevitable consequence of induction charging, which is that the opposite polarity droplets would otherwise be so strongly attracted to the source of the induced voltage (7) that the droplets would not be available for delivery by inhalation, or other forms of deposition onto target surfaces.

In Figure 3, one or more electrically floating conducting or semi-conducting surfaces (10), attached to one or more capacitors (11) are used to attract and capture the gaseous ions so that the electric field created by the electrode (6) acts directly upon the nozzle (8) without impingement of gas ions. Such gas ions, if allowed to reach the nozzle unimpeded would be expected to modify the electric field surrounding the nozzle so as to prevent the emerging liquid from forming the necessary jet of liquid for atomization by the electrohydrodynamic method. The capacitor(s) is chosen to have a time constant of the same order as the time required to establish a spray cloud. This time constant will have a value, in seconds, which is the product of the capacitance, C and the resistance, R, of the capacitor. The value of $C \times R$ is thus chosen so that the capacitor will charge by bombardment of gaseous ions, until it reaches a sufficient potential to modify the electric field and to re-direct the ions toward the established spray cloud. Generally, the time-constant required will be of the order of seconds or a number of milliseconds. For example, a capacitor

of 0.1 microfarad with a resistance of 10 megohms will produce a time constant of one second. Figure 3 shows one configuration that will create the required induction potential at the nozzle when the electrode (7) is energized and, after a suitable period, dependent upon the position and time constant of the capacitor(s) will then re-arrange the field to allow gaseous ions to migrate into the spray cloud so as to modify the charges on all droplets to a lower (optimal) or approximately zero value. Such droplets may then be readily inhaled.

The charged droplets are prevented from impinging upon the high voltage electrode (7) by the action of fast moving gaseous ions. These ions are created by the combination of electrode voltage, say one to ten kilovolts dc, and the radius of curvature of the small dimension of the ridge or nipple (6) on the balancing member (3) and by juxtaposition of the nozzle (9), the electrode (7) and the capacitor(s) (11) which latter may be used to increase the degree of control of the shape of the field and the timing of the essential reshaping process.

Liquid is supplied to the nozzle (9) from either a container (13) by gravity feed, or by mechanical pumping, or by one of the electrokinetic pumping devices described in Patent Application 9215984.7. The liquid is supplied to the nozzle and the induced voltage applied by the electrode (7) before the electric field is modified to create gaseous ions by the actuation of the flap-valve (2) and/or the capacitor(s) (11). Then, at any time after the spray cloud is developed, the breath-actuated valve and/or the capacitor(s) is actuated, whereupon the droplet trajectories are modified; moving away from their direct flight to the electrode (7), through the required angle, say to flow by viscous drag in the air movement caused by normal breathing. This action is virtually instantaneous due to the extremely low inertial forces on droplets used for inhalation therapy, which are generally less than about 10.0 μm in diameter for drug inhalation.

An alternative method of creating the required induction potential to atomize the liquid and subsequently discharge the droplets before impingement upon the induction electrode is to use an induction electrode (14) such as, for example, a ring with two distinct cross-sectional radii of curvature, as shown in Figure 4. This method may be used with or without a flap valve (2), or field modifying capacitor(s) (11). The larger radius faces toward the nozzle tip, whilst the smaller radius (say less than about 1.0mm) faces away from the nozzle (9). It has been found that, by very careful design of the field pattern, charged droplets may have sufficient inertial force to pass through a gap in the electrode (14) without immediate impingement. Although these droplets are then almost immediately forced back to impinge upon the electrode, they may be prevented from doing so by the neutralizing action of the fast moving gaseous ions. It has been further discovered that production of gaseous ions

by gas breakdown at the smaller radius of curvature may be delayed by maintaining the field strength at the electrode below the critical value until the charged droplets enter the field, whereupon they will increase the field strength to the critical value and immediately trigger the droplet discharge process.

5 The critical field strength and shape is a function of: electrode position, shape, and voltage; the relative positions and potentials of the nozzle and capacitor(s) surfaces and the degree and position of space charge potential created by the charged droplets.

10 It has also been found that the methods of controlled field modification (with time) disclosed herein may be so set as to both discharge and, if required, to recharge the droplets to an optimal value. This could be of importance in, say, ensuring accurate deposition of droplets within a human lung, where both the droplet's mass, and its charge have controlling influence upon the zones of deposition within the system of airways through which the droplets pass during inhalation.

15 A particular example of the device and its operation is shown in Figure 5: An earthed needle, (15) concentrically located within a non-conducting sleeve (16) allowed liquid to flow (by gravity or other light pressure) to an outlet nozzle (17) where the liquid was exposed to a strong convergent electric field provided by a high potential supplied to the flat, smooth surface of electrode (18). This resulted in an
20 induced electrohydrodynamic (EHD) communiton of the liquid emerging from capillary nozzle (17).

After the communiton was established (and within less than one second) a sharp element (19) of the induction electrode (18) was exposed.

25 The exposure of (19) above the smooth surface of (18) produced gaseous ions of the polarity of the high voltage dc. generator (20). Since the EHD spray cloud was induced from an earthed electrode-nozzle (17), the gaseous ions and the spray droplets have opposing polarities. And as the gaseous ions have much greater mobility in the electric field containing both droplets and ions, the droplets were bombarded and hence electrically discharged.

30 In the experiment described, the distance between tip of nozzle (17) and flat electrode was 30mm. When the sharp electrode (19) was positioned to discharge the droplets, the distance between tip of nozzle (17) and needle-tip (19) was 23mm. The liquid flow-rate was 1.34 $\mu\text{l}/\text{sec}$. The high voltage source was set at a negative potential of 10.7 kilovolts.

35 The liquid used was 80% ethanol and 20% polyethylene glycol (200), having a viscosity of 2.2c Poise, a surface tension of 25.0m N/m, a resistivity of $1.7 \times 10^3 \text{ohm.m}$ and a density of 0.86 kg/litre.

The discharging effect was assessed to be essentially 100 per cent.

Claims



1. An electrohydrodynamic dispensing device for comminuting a liquid, wherein
5 the liquid is comminuted by an induced electrical charge.
2. A device according to claim 1, which comprises a comminution site, a means
for supplying liquid to the comminution site and a means for inducing an electrical
charge at the comminution site sufficient to comminute the liquid.
- 10 3. A device according to claim 1 or claim 2, wherein the means for inducing the
electrical charge at the comminution site is a high voltage generator or a piezo-
electric generator.
- 15 4. A device according to any one of claims 1 to 3, which also comprises a means
for partially or fully electrically neutralising the liquid comminution before it impacts
the induced charging means.
- 20 5. A device according to claim 4, wherein the means for partially or fully
electrically discharging the liquid comminution is a sharp or pointed discharge
electrode located downstream of the comminuted liquid.
- 25 6. A device according to claim 5, wherein the sharp or pointed discharge
electrode is earthed or maintained at a polarity opposite to that of the induced
charging means.
7. A device according to claim 4, wherein the means for fully or partially
discharging the liquid comminution is provided by an electrode arranged to have a
first surface capable of producing an electric field sufficient to induce the required
30 charge for liquid comminution in the comminution means and also to impart
sufficient inertia to the liquid comminution so that it substantially bypasses the first
surface, the electrode also having a second surface capable of producing an ionic
discharge to fully or partially discharge the liquid comminution..
- 35 8. A device according to claim 7, wherein the electrode is an annular electrode
coaxially located with respect to the intended flight path of the liquid comminution,
in use the upper surface of the annular electrode induces the required charge in the



comminution means, the lower surface being shaped so as to produce the ionic discharge.

9. A device according to claim 4, wherein the means for fully or partially
5 discharging the liquid comminution is provided by a combination of the sharp or
pointed discharge electrode and at least one capacitor, the capacitor acting to absorb
the charge from the gaseous ions from the sharp or pointed discharge electrode until
the induced comminution of the liquid is established, thereafter the capacitor ceases to
absorb the ions thereby allowing them to partially or fully discharges the liquid
10 comminution.
10. A device according to any one of claims 1 to 9, adapted for dispensing a liquid
for inhalation, wherein the liquid is comminuted by an induced electrical charge.
11. A device according to claim 10, for use in dispensing, perfumes, aromas or for
15 the inhaled delivery of a medicament.
12. An inhaler, comprising an electrohydrodynamic comminution means, a means
for partially or fully discharging the liquid comminution and a conduit through which
20 the liquid comminution is administered, wherein the discharging means is arranged to
be activated by inhalation of the user.
13. A device according to claim 12, wherein the charging means acts by induction
to produce the required charge on the comminution means.
25
14. A device according to claim 12 or 13, which comprises a valve means located
so as to open and close the conduit, the valve means being opened by inhalation of the
user which then activates the discharging means.
15. A device according to any one of claims 12 to 14, wherein the discharging
30 means is a sharp edged or pointed electrode which is operationally attached to the
valve means such that when the valve means opens the sharp edged or pointed
electrode is exposed to the comminuted liquid.
16. A device according to any one of claims 12 to 15, wherein the valve means is
35 a flap valve, the sharp edged or pointed electrode being fixed so as to extend upwards
from the plane of the flap valve, the flap valve being pivotally fixed so as to open and

close the conduit, such that when the flap valve pivots open the sharp edged or pointed electrode pivots into the flight path of the comminuted liquid.

17. A device according to any one of claims 12 to 15, wherein the sharp edged or
5 pointed electrode pivots into a recess formed in the charging means when the valve means closes.

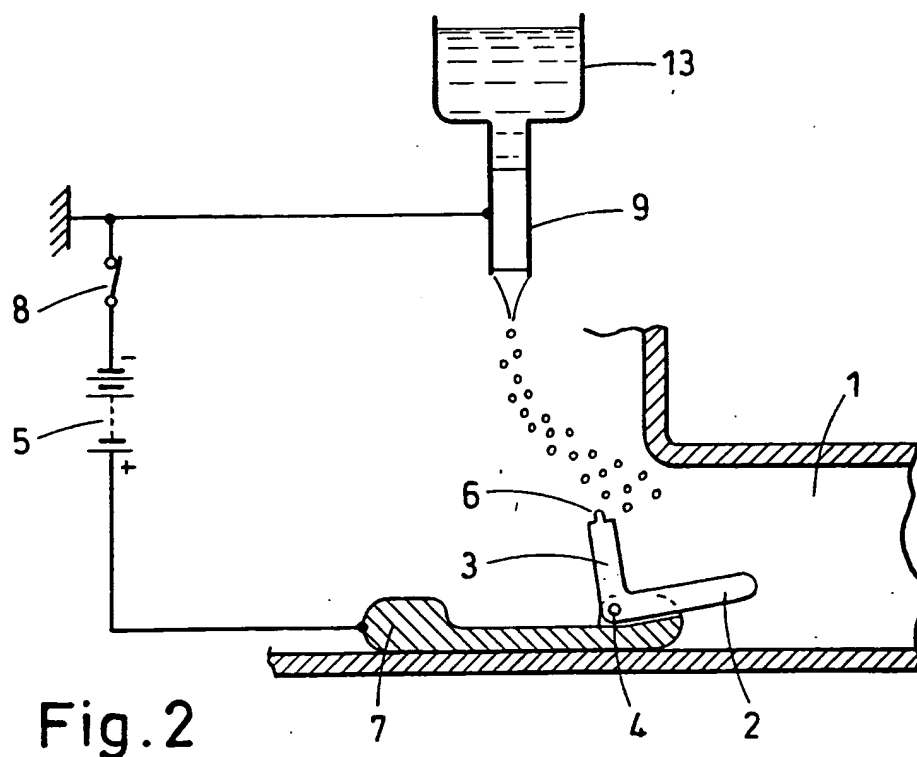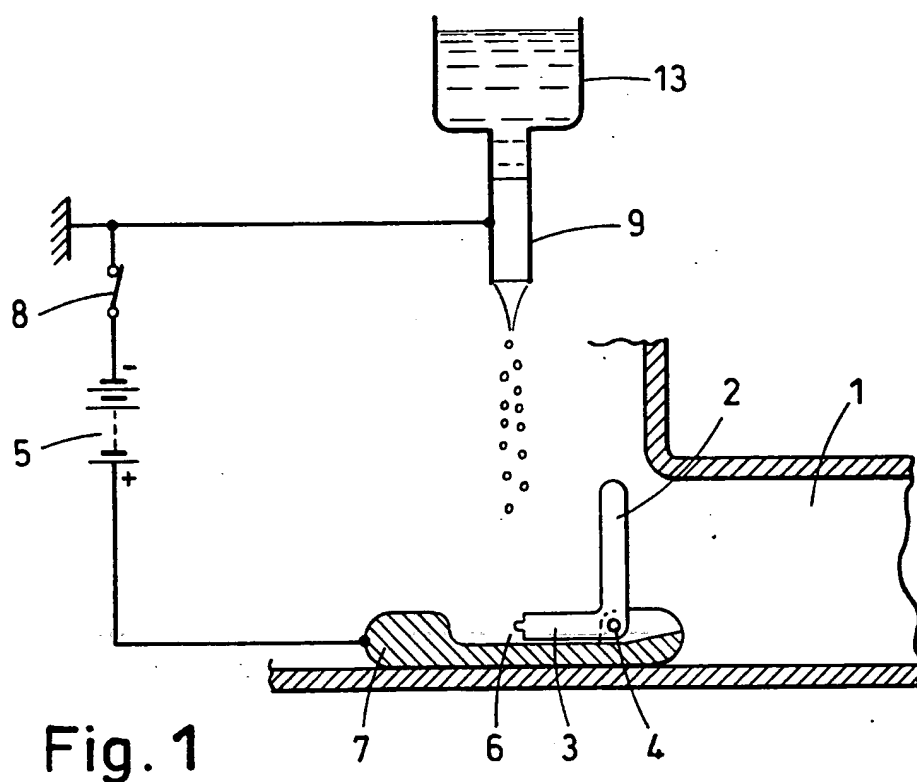

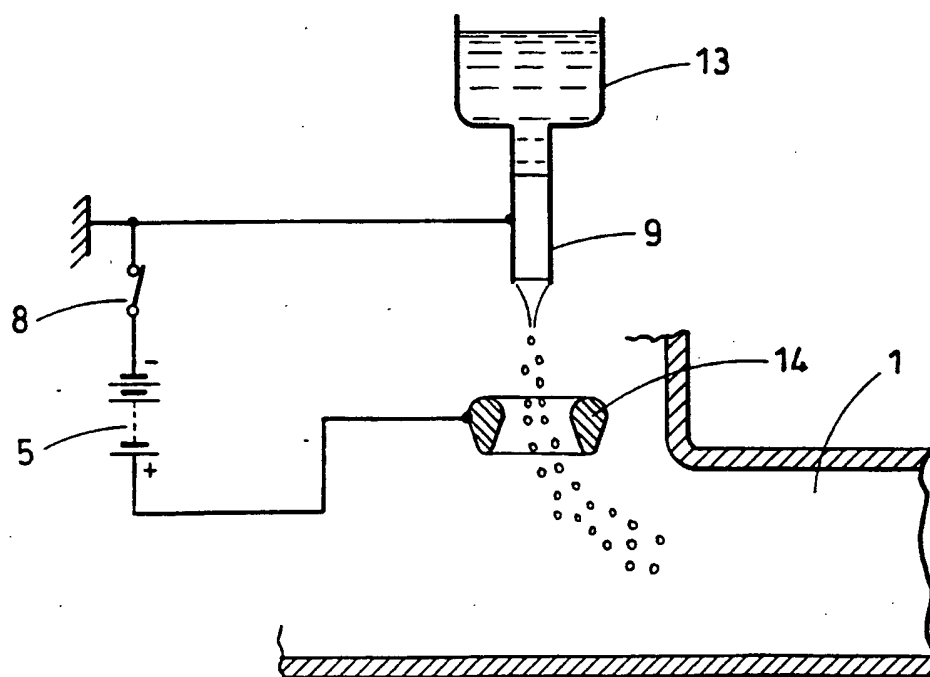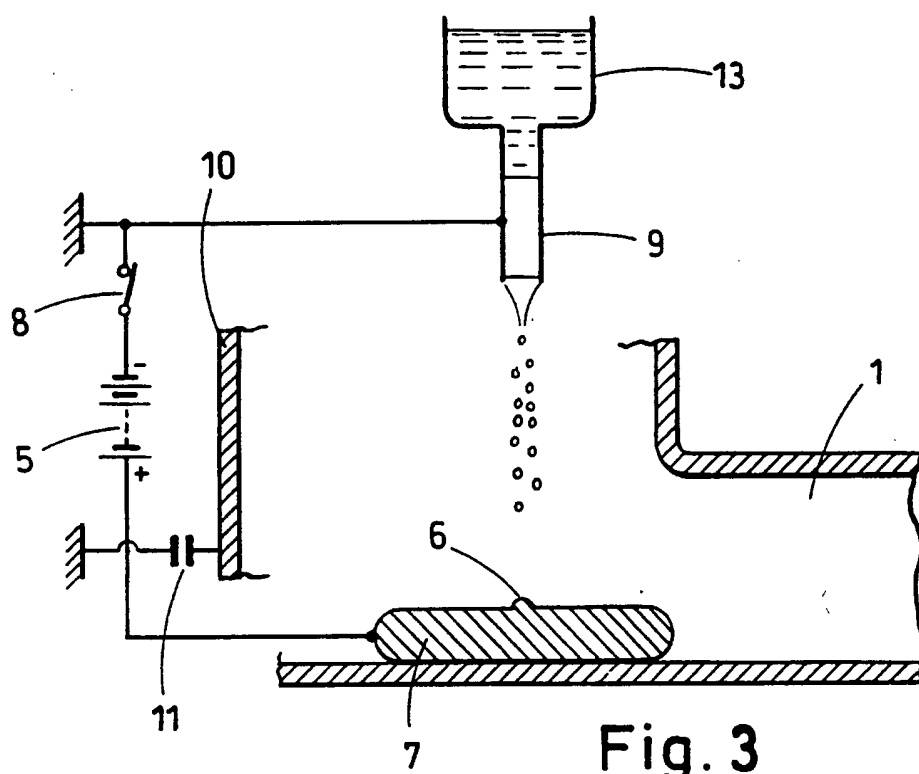

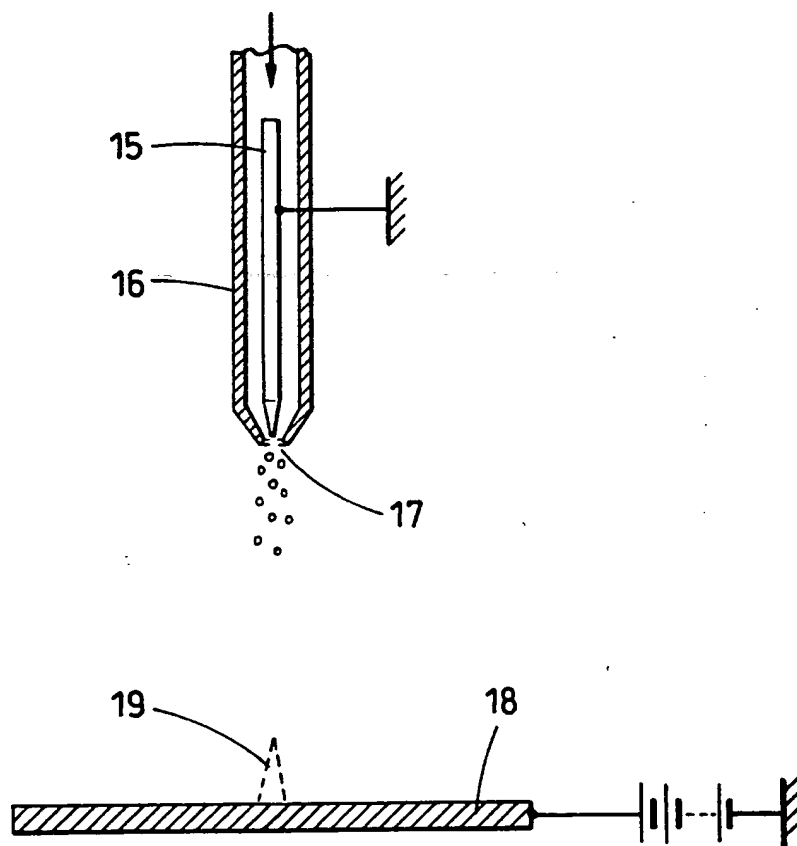


Fig. 5

THIS PAGE BLANK (USPTO)

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|----|---|
| (51) International Patent Classification ⁵ : B05B 5/043, A61M 15/00 | A3 | (11) International Publication Number: WO 94/14543 (43) International Publication Date: 7 July 1994 (07.07.94) |
|---|----|---|

(21) International Application Number: PCT/GB93/02634
(22) International Filing Date: 22 December 1993 (22.12.93)
(30) Priority Data:
9226717.8 22 December 1992 (22.12.92) GB

(71) Applicant (for all designated States except US): ELEC-
TROSOLS LTD. [GB/GB]; Thursley Copse, Farnham
Lane, Haslemere, Surrey GU27 1HA (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): COFFEE, Ronald, Alan
[GB/GB]; Thursley Copse, Farnham Lane, Haslemere,
Surrey GU27 1HA (GB).

(74) Agent: RUTTER, Keith; SmithKline Beecham, Corporate
Intellectual Property, Great Burgh, Yew Tree Bottom Road,
Epsom, Surrey KT18 5XQ (GB).

(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ,
DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV,
MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE,
SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE,
DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI
patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE,
SN, TD, TG).


Published

With international search report.

Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.

(88) Date of publication of the international search report:
15 September 1994 (15.09.94)

(54) Title: DISPENSING DEVICE

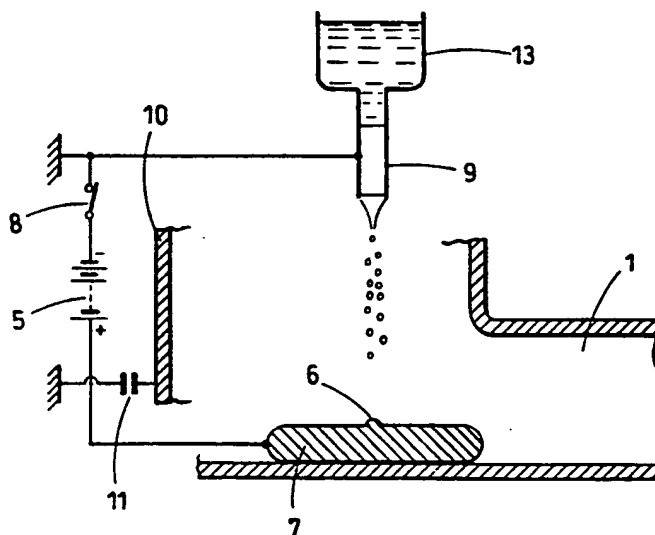

(57) Abstract

An electrohydrodynamic dispensing device for comminuting a liquid, wherein the liquid is comminuted by an induced electrical charge.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|----|--------------------------|----|---------------------------------------|----|--------------------------|
| AT | Austria | GB | United Kingdom | MR | Mauritania |
| AU | Australia | GE | Georgia | MW | Malawi |
| BB | Barbados | GN | Guinea | NE | Niger |
| BE | Belgium | GR | Greece | NL | Netherlands |
| BF | Burkina Faso | HU | Hungary | NO | Norway |
| BG | Bulgaria | IE | Ireland | NZ | New Zealand |
| BJ | Benin | IT | Italy | PL | Poland |
| BR | Brazil | JP | Japan | PT | Portugal |
| BY | Belarus | KE | Kenya | RO | Romania |
| CA | Canada | KG | Kyrgyzstan | RU | Russian Federation |
| CF | Central African Republic | KP | Democratic People's Republic of Korea | SD | Sudan |
| CG | Congo | KR | Republic of Korea | SE | Sweden |
| CH | Switzerland | KZ | Kazakhstan | SI | Slovenia |
| CI | Côte d'Ivoire | LJ | Liechtenstein | SK | Slovakia |
| CM | Cameroon | LK | Sri Lanka | SN | Senegal |
| CN | China | LU | Luxembourg | TD | Chad |
| CS | Czechoslovakia | LV | Latvia | TG | Togo |
| CZ | Czech Republic | MC | Monaco | TJ | Tajikistan |
| DE | Germany | MD | Republic of Moldova | TT | Trinidad and Tobago |
| DK | Denmark | MG | Madagascar | UA | Ukraine |
| ES | Spain | ML | Mali | US | United States of America |
| FI | Finland | MN | Mongolia | UZ | Uzbekistan |
| FR | France | | | VN | Viet Nam |
| GA | Gabon | | | | |

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 93/02634

A. CLASSIFICATION OF SUBJECT MATTER
IPC 5 B05B5/043 A61M15/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 B05B A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------------|---|-------------------------|
| X Y A A | WO,A,91 07232 (SICKLES J.E.) 30 May 1991 see page 34, line 2 - page 35, line 2; figure 4 --- | 1-3 12-14 15 4 |
| X | TRANSACTIONS OF THE AMERICAN SOCIETY OF AGRICULTURAL ENGINEERS, vol.9, no.4, 1966, SAINT JOSEPH, MICH US pages 501 - 506 S. E. LAW AND H. D. BOWEN 'charging liquid spray by electrostatic induction' --- | 1-3 |
| X | US,A,4 266 721 (SICKLES) 12 May 1981 see the whole document --- | 1-3 |
| | --- -/-- | |

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 July 1994

Date of mailing of the international search report

01.08.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Guastavino, L

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 93/02634

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|--|-----------------------|
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| Y | DE,A,20 08 769 (RIKER LABORATORIES) 3 September 1970 see the whole document ----- | 12-14 |

INTERNATIONAL SEARCH REPORT

international application No.

PCT/GB93/02634

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. CLAIMS 1-11: Electrostatic apparatus with INDUCED charging means.
2. CLAIMS 12-17: Inhaler wherein the discharging means is activated by inhalation of the user.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 93/02634

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|--|--|
| WO-A-9107232 | 30-05-91 | US-A- 5044564 AU-A- 6953791 CA-A- 2030425 EP-A- 0502114 JP-T- 5501675 | 03-09-91 13-06-91 22-05-91 09-09-92 02-04-93 |
| US-A-4266721 | 12-05-81 | NONE | |
| DE-A-2008769 | 03-09-70 | BE-A- 746636 CH-A- 521132 FR-A- 2037445 GB-A- 1297993 NL-A- 7002237 SE-B- 378989 US-A- 3565070 | 27-08-70 15-04-72 31-12-70 29-11-72 01-09-70 22-09-75 23-02-71 |